





Product Name	Exothermic Welding Powder
Product Code	C-X
Application	Grounding/Earthing And Lightning Protection
Applicable Standards	IEEE 837

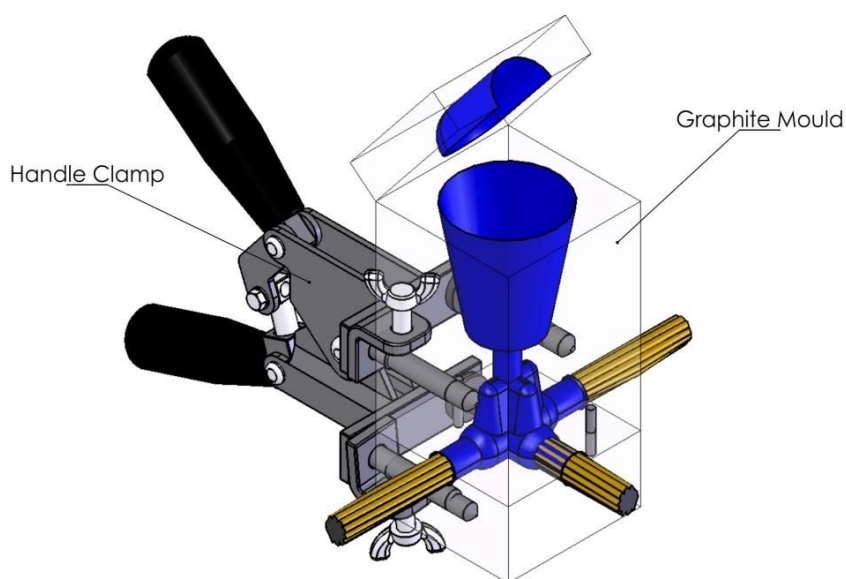

Product Information	
Weight	From 15gr To 300gr
Package Type	Water Proof Sealed AL Bag
Reaction Outcome	$\text{CU} + \text{AL}_2\text{O}_3$
Corrosion Tests	-5gr In 10% Nitric Acid for 48Hours NaCl Spray Test +500 Hours with no Sign
CU Percentage (Weight)	>97%
Exothermic Reaction Temperature	2570 ° C
Resistance (30°C)	164 $\mu\Omega$
Exothermic Welding System is Used for Permanent Electrical Connections	

**CAJHIZAT SYSTEM ZAMIN CO.**

Tel: +98 21 77940716/77959032

Fax: +98 21 77953528

E-Mail: Info@tsamin.com

