





کابل شو مسی قلع اندود	نام محصول
CLxx-xx	کد محصول
سیستم های ارت، همبندی و حفاظت صاعقه	کاربرد
DIN 46235	استاندارد
جنس (99.9% مس قلع اندود)	جنس

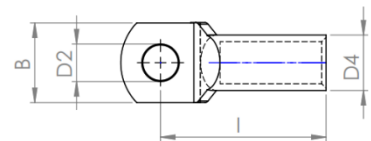


سایز mm ²	پیچ	کد محصول	ابعاد (mm)							
			D1	A	B	D2	D4	C1	C2	I
6	M5	CL6-5	3.8	10	8.5	5.3	5.5	6.5	7.5	24
	M6	CL6-6	3.8	10	8.5	6.4	5.5	7.5	8	24
	M8	CL6-8	3.8	10	13	8.4	5.5	10	10	24
10	M5	CL10-5	4.5	10	9	5.3	6	7	8.5	27
	M6	CL10-6	4.5	10	9	6.4	6	7.5	8.5	27
	M8	CL10-8	4.5	10	13	8.4	6	10	10	27
16	M6	CL16-6	5.5	20	13	6.4	8.5	7.5	8	36
	M8	CL16-8	5.5	20	13	8.4	8.5	10	10	36
	M10	CL16-10	5.5	20	17	10.5	8.5	12	12	36
	M12	CL16-12	5.5	20	18	13	8.5	13	13	36
25	M6	CL25-6	7	20	14	6.4	10	7.5	8	38
	M8	CL25-8	7	20	16	8.4	10	10	10	38
	M10	CL25-10	7	20	17	10.5	10	12	12	38
	M12	CL25-12	7	20	19	13	10	13	13	38
35	M6	CL35-6	8.2	20	17	6.4	12.5	7.5	8	42
	M8	CL35-8	8.2	20	17	8.4	12.5	10	10	42
	M10	CL35-10	8.2	20	19	10.5	12.5	12	12	42
	M12	CL35-12	8.2	20	21	13	12.5	13	13	42
	M14	CL35-14	8.2	20	21	14.5	12.5	14.5	14.5	42
50	M8	CL50-8	10	28	20	8.4	14.5	10	10	52
	M10	CL50-10	10	28	22	10.5	14.5	12	12	52
	M12	CL50-12	10	28	24	13	14.5	13	13	52
	M14	CL50-14	10	28	24	14.5	14.5	14.5	14.5	52
	M16	CL50-16	10	28	28	16.5	14.5	16	16	52
70	M8	CL70-8	11.5	28	24	8.4	16.5	10	10	55
	M10	CL70-10	11.5	28	24	10.5	16.5	12	12	55
	M12	CL70-12	11.5	28	24	13	16.5	13	13	55
	M14	CL70-14	11.5	28	24	14.5	16.5	14.5	14.5	55
	M16	CL70-16	11.5	28	30	16.5	16.5	16	16	55
95	M8	CL95-8	13.5	35	28	8.4	19	12	12	65
	M10	CL95-10	13.5	35	28	10.5	19	12	12	65
	M12	CL95-12	13.5	35	28	13	19	13	13	65
	M14	CL95-14	13.5	35	28	14.5	19	14.5	14.5	65
	M16	CL95-16	13.5	35	32	16.5	19	16	16	65

تجهیزات سیستم زمین
تلفن : +98 21 77940716/77959032
فکس : +98 21 77953528
ایمیل : Info@tsamin.com






نام محصول	کابلشو مسی قلع اندود
کد محصول	CLxx-xx
کاربرد	سیستم های ارت، همبندی و حفاظت صاعقه
استاندارد	DIN 46235
جنس	مس قلع اندود (99.9%)

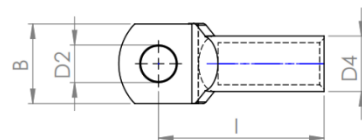

سایز mm ²	پیچ	کد محصول	ابعاد (mm)							
			D1	A	B	D2	D4	C1	C2	I
120	M10	CL120-10	15.5	35	32	10.5	21	15	16	70
	M12	CL120-12	15.5	35	32	13	21	16	17	70
	M14	CL120-14	15.5	35.3	32	15	21	18	19	70
	M16	CL120-16	15.5	35	32	17	21	19	20	70
	M20	CL120-20	15.5	35	38	21	21	21	22	70
150	M10	CL150-10	17	35	34	10.5	23.5	15	16	78
	M12	CL150-12	17	35	34	13	23.5	16	17	78
	M14	CL150-14	17	35	34	15	23.5	19	20	78
	M16	CL150-16	17	35	34	17	23.5	19	20	78
	M20	CL150-20	17	35	40	21	23.5	21	22	78
185	M10	CL185-10	19	40	37	10.5	25.5	15	16	82
	M12	CL185-12	19	40	37	13	25.5	16	17	82
	M14	CL185-14	19	40	37	15	25.5	19	20	82
	M16	CL185-16	19	40	37	17	25.5	19	20	82
	M20	CL185-20	19	40	40	21	25.5	21	22	82
240	M12	CL240-12	21.5	40	42	13	29	16	17	92
	M14	CL240-14	21.5	40	42	15	29	19	20	92
	M16	CL240-16	21.5	40	42	17	29	19	20	92
	M20	CL240-20	21.5	40	45	21	29	21	22	92
300	M14	CL300-14	24.5	50	46	15	32	19	22	100
	M16	CL300-16	24.5	50	46	17	32	19	22	100
	M20	CL300-20	24.5	50	46	21	32	22	22	100



تجهیزات سیستم زمین

تلفن : +98 21 77940716/77959032

فکس : +98 21 77953528

ایمیل : Info@tsamin.com

